


Infinicor SX+ Duplex, Riser

DUPLEX

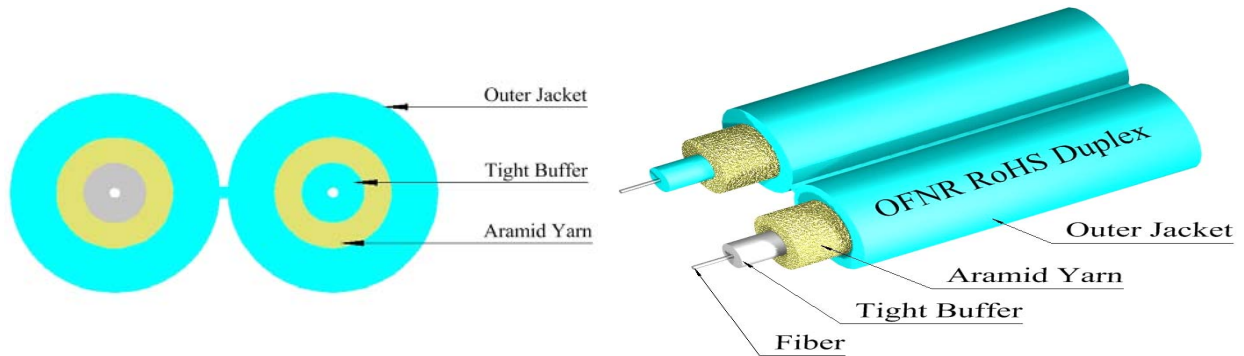

The Light Connections Duplex Cable is composed of two tight buffers, aramid yarn, and a PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.

TLC Duplex Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNR cables are available, and unlisted, unrated cables can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print can also be accommodated.



Product Specifications

Storage Temp. (C°)
-40 / +70

Operating Temp. (C°)
-20 / +70

Jacket Characteristics

TLC Part Number	Jacket Material	Fiber Count	Nominal Dimension	Weight lbs. / Km	Pull Load (N) Install / Operate	Bend Radius (cm) Install / Operate
M50DX02CXNRA	PVC Aqua	2	2.95 mm x 4.5 mm	32	2664/2132	4.4/2.9
M50DX02CXNRA20	PVC Aqua	2	1.95 mm x 4.1 mm	28	1332/1066	2.9/1.9
M50DX02CXNRA18	PVC Aqua	2	1.80 mm x 3.6 mm	26	1332/1066	2.7/1.8
M50DX02CXNRA16	PVC Aqua	2	1.60 mm x 3.2 mm	24	1332/1066	2.4/1.6

Optical Characteristics

Fiber Type	Core Size	Attenuation (MAX)	Bandwidth (LED) 850 nm	Bandwidth (LED) 1300 nm	Link Lengths @ 850nm 1 GB/s / 10 GB/s
Infinicor SX+	50/125	3.50 dB/km @ 850nm	1500 MHz	500 MHz	1,000 mtr / 300 mtr

For more information on the fiber characteristics, please consult with your TLC representative. You can also visit the TLC website at www.thelightconnection.com



Address: 132 Base Road, Oriskany, NY 13424
 Phone: 315 736-7384
 Fax: 315 736-1927
 Email: info@thelightconnection.com
 On the web: www.thelightconnection.com

REV-3.0 Date- 12/16/09

Supersedes REV- 2.0 Date- 10/16/09

