


48 Fiber SMF28e+ Micro Distribution, Riser

Part Number
S09MD48CNRY4T-Y

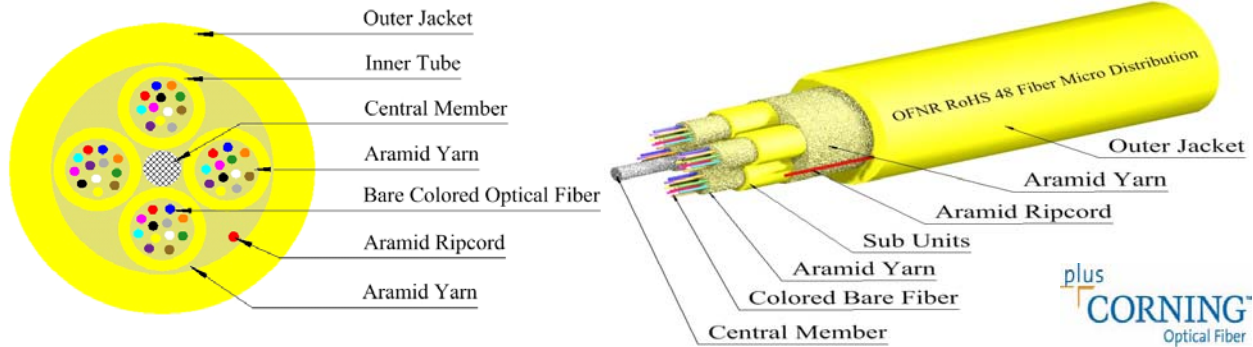

The Light Connection's 48 fiber Micro Distribution Cable is composed of four sub units, an optional central member, an aramid ripcord, and a PVC outer jacket. Each sub-unit consists of 12 colored glass fibers surrounded by aramid yarn with a PVC jacket 2.95mm in diameter. All component materials meet the EU RoHS and REACH Directive standards. Sub-units can be color-coded or sequentially numbered.

TLC Micro Distribution Cable is available in 12 TIA standard colors or special-order colors. UL Listed OFNR cables are available, and unlisted, unrated cable can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating and fiber type, and includes footage markers. Custom print can also be accommodated.



Product Specifications

Storage Temp. (C°)
-40 / +70

Operating Temp. (C°)
-20 / +70

Cable Characteristics

| TLC Part Number | Jacket Material | Fiber Count | Nominal Dimension | Weight lbs. / Km | Pull Load (N) Install / Operate | Bend Radius (cm) Install / Operate |
|-----------------|-----------------|-------------|-------------------|------------------|---------------------------------|------------------------------------|
| S09MD48CNRY4T-Y | PVC Yellow | 48 | 10.75 mm | 157 | 5328/4263 | 15/10 |

Optical Characteristics

| Fiber Type | Core Size | Attenuation (MAX) | Link Lengths @ 1550nm 1 GB/s / 10 GB/s |
|------------|-----------|---------------------|---|
| SMF28e+ | 9/125 | 0.50 dB/km @ 1550nm | 10,000 mtr / 5,000 mtr |

For more information on the fiber characteristics, please consult with your TLC representative.
You can also visit the TLC website at www.thelightconnection.com



Address: 132 Base Road, Oriskany, NY 13424
Phone: 315 736-7384
Fax: 315 736-1927
Email: info@thelightconnection.com
On the web: www.thelightconnection.com

REV-2.0 Date- 9/27/11

Supersedes REV- 1.0 Date- 7/21/09